

AQUAFOS

PRESSURE TANKS

5
YEAR
WARRANTY



Features:

- NSF Standard 61, IAMPO R&T UPC approved
 - Polypropylene liner ensures long durability
 - Butyl diaphragm assure long life and safety
 - Highly rust resistant durable baked epoxy coating finish
 - Cast stainless steel water connection
 - Leak free, o-ring sealed air valve cap
 - 100% pressure tested
 - No maintenance
- All connections are stainless steel
 - All tanks are pre-charged at 30psi / 2 bar unless stated otherwise
 - Maximum Working Pressure - 150 psi / 10 bar
 - Maximum Working Temperature: 200°F / 90°C




Leak free, o-ring sealed air valve cap

Epoxy coating finish

Butyl diaphragm

Polypropylene liner

Stainless steel connector

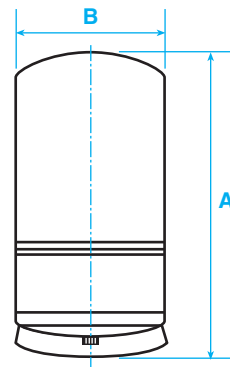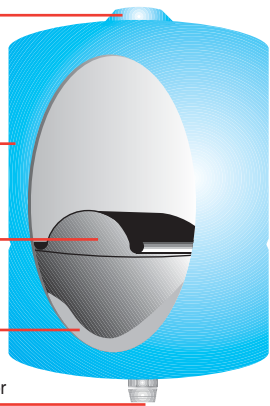

Model No	Volume		Dimensions				Connection	Weight	
			A		B			kg	lbs
BSP	Litre	Gal.	mm	inches	mm	inches			
SPTB3									
SPTB8	8	2	300	11.7	202	7.9	1" BSP	2.5	5.5
SPTB18	18	4.5	380	14.8	276	10.8	1" BSP	4.2	9.3
SPTB24	24	6	420	16.4	290	11.3	1" BSP	4.7	10.4
Vertical Models with Base									
SPTB58	58	14.5	560	21.8	390	15.2	1" BSP	11.5	25.3
SPTB80	80	20	680	26.5	390	15.2	1" BSP	13.0	28.7



PUMPMASTER AUSTRALIA PTY LTD
81-83 BAYFIELD ROAD EAST
BAYSWATER NTH VIC 3153
Ph: (03) 9738 1444
Fax:(03) 9738 1666
www.pumpmaster.com.au

AVAILABLE FROM: